PCT

(51) International Patent Classification 6 : H04B 10/12, G02B 6/10	A1	(11) International Publication Number: WO 00/45532
		(43) International Publication Date: 3 August 2000 (03.08.00)

(21) International Application Number: PCT/AU99/00056

(22) International Filing Date: 28 January 1999 (28.01.99)

(71) Applicants (for all designated States except US): THE UNI-VERSITY OF MELBOURNE [AU/AU]; Grattan Street, Parkville, VIC 3052 (AU). THE UNIVERSITY OF SYDNEY [AU/AU]; Parramatta Road, Sydney, NSW 2006 (AU). TELSTRA CORPORATION LIMITED [AU/AU]; 242 Exhibition Street, Melbourne, VIC 3000 (AU).

(72) Inventors; and
(75) Inventors/Applicants (for US only): GAN, Hongbing [CN/AU]; 5/635 Drummond Street, Carlton North, VIC 3054 (AU). LOWERY, Arthur, James [GB/AU]; 136 Derby Street, Kew, VIC 3101 (AU). LAUDER, Richard, David, Templeton [GB/AU]; 1/12 Fulham Road, Alphington, VIC 3078 (AU). SCEATS, Mark [AU/AU]; 74 Lamb Street, Lilyfield, NSW 2040 (AU).

(74) Agent: GRIFFITH HACK; G.P.O. Box 4164, Sydney, NSW 2001 (AU).

(81) Designated States: AU, CA, JP, KR, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.

(54) Title: NOISE SUPPRESSION IN LIGHTWAVE COMMUNICATION SYSTEMS
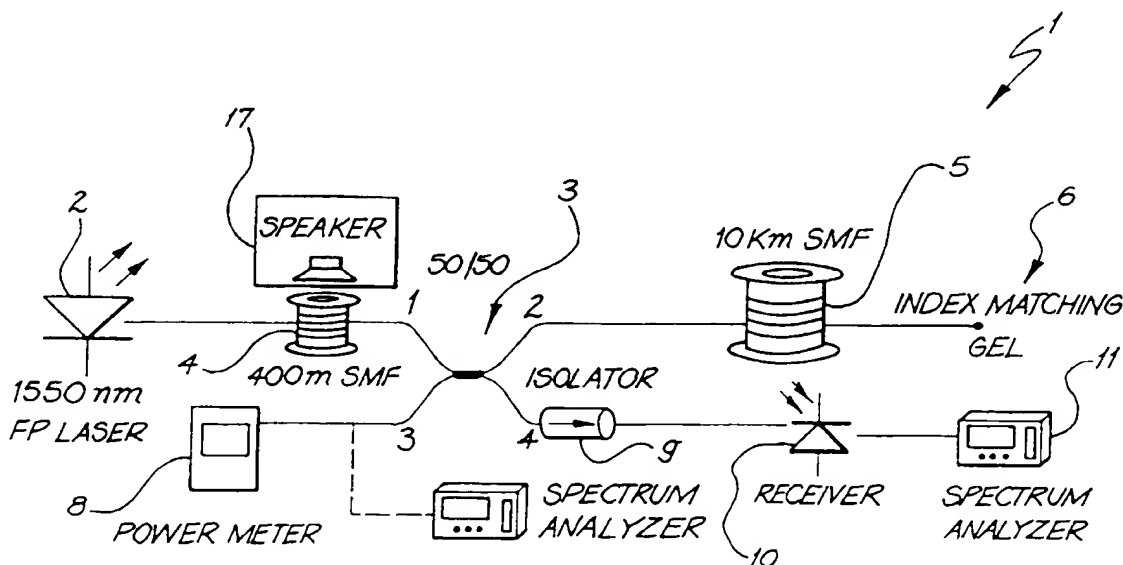
(57) Abstract

An optical communications system comprising: a laser source; an optical waveguide interconnected to the laser source to carry an optical signal from the source to an optical receiver; an optical receiver interconnected to the optical waveguide for decoding the signal; a mechanical modulator adapted to substantially continuously mechanically perturb a portion of the optical waveguide so as to reduce Rayleigh backscattering from the optical waveguide.

NOISE SUPPRESSION IN LIGHTWAVE COMMUNICATION SYSTEMS

Field of the Invention

The present invention relates to optical fibre communications systems and in particular, discloses a
5 method of suppressing noise in an optical fibre communications system.

Background of the Invention

In optical fibre telecommunications systems, a laser is modulated with a transmission signal with the
10 output of the laser being fed over an optical fibre of quite some distance. At the end of the optic fibre a receiver is placed for receiving and decoding the transmitted signal.

Due to Rayleigh Backscattering (RB) from the
15 fibre system (See K.D. Laviolette, "The impact of Rayleigh Backscatter induced noise on QPSK transmission with Fabry-Perot lasers' IEEE Photon. Technol. Lett., Vol 10, no. 11, pp 1644-1646, Nov 1998."), it is often the case that the fibre waveguide provides for optical feedback to the laser
20 system which can in turn, in common with discreet reflections, introduce an instability in the laser and thereby degrade system performance. The presence of Rayleigh Backscattering normally requires the utilization of an optical isolator so as to isolate the feedback from
25 the lazing system. The utilizing of optical isolators can dramatically increase the cost of an optical fibre telecommunications system.

It would be desirable to substantially reduce the effects of Rayleigh Backscattering without the need to
30 utilize an optical isolator.

Summary of the Invention

In accordance with a first aspect of the present invention, there is provided in an optical fibre lasing system including a feedback laser system interconnected
35 with an optical waveguide, such as an optical fibre, a method of reducing the feedback effects from Rayleigh backscattering comprising the step of: subjecting portions

of the optical waveguide to low frequency mechanical vibration so as to reduce feedback from Rayleigh backscattering of the optical waveguide.

The low frequency mechanical vibration can
5   comprise a continuous oscillation in the range of 300Hz to 2500Hz or 300Hz to 40KHz.

The mechanical vibration of the optical waveguide preferably occurs substantially adjacent to the interconnection with the laser system.

10   In accordance with a further aspect of the present invention, there is provided an optical communications system comprising a laser source; an optical waveguide interconnected to the laser source to carry an optical signal from the source to an optical receiver; an
15   optical receiver interconnected to the optical waveguide for decoding the signal; and a mechanical modulator adapted to substantially continuously mechanically perturb a portion of the optical waveguide so as to reduce Rayleigh backscattering from the optical waveguide.

20   The mechanical modulator can be in contact with the optical waveguide or the mechanical modulator can emit an audio signal in the presence of the optical waveguide. The mechanical modulator preferably interacts with an initial portion of the optical waveguide substantially
25   adjacent the interconnection with the feedback laser.

The optical waveguide can comprise an optical fibre and further preferably can include a portion having an offset core with the mechanical modulator perturbing the portion.

30   Brief Description of the Drawings

Notwithstanding any other forms which may fall within the scope of the present invention, preferred forms of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:
35   Fig. 1 illustrates schematically the arrangement of a first embodiment of the present invention;

Fig. 2 illustrates the laser output power

frequency spectrum (with a 2MHz resolution bandwidth) with and without the present invention;

        Fig. 3 illustrates the Rayleigh backscatter power with respect to time, with and without the present
5   invention;

        Fig. 4 illustrates the Rayleigh backscatter power frequency spectrum (with a 2MHz resolution bandwidth) with and without the present invention;

        Fig. 5 illustrates an alternative embodiment;
10   Fig. 6 illustrates the utilization of an offset core fibre in an alternative embodiment.

Description of Preferred and Other Embodiments

        In a first embodiment, the Rayleigh Backscattering feedback is suppressed through the
15 utilization of an audio frequency external optical phase modulation. The result is the suppression of the noise tones and the restoration of the laser linewidth. The utilization of the audio frequency modulation allows for effective operation of Fabry-Perot lasers without
20 utilization of an optical isolator.

        A first example embodiment was constructed in accordance with the arrangement 1 as illustrated in Fig. 1. A Fujitsu FLD150C2KM 1550-nm Fabry-Perot laser 2 was biased with 25-mA dc current and generated -2.5 dBm optical power.
25 Its output was coupled to port 1 of a 50/50 coupler 3 via 400m of standard single-mode fibre (SMF) 4. Port 2 of the coupler was fusion spliced to 10km of standard SMF 5 with the fibre's far end 6 immersed in index matching gel to suppress Fresnel reflection; thus RB was the dominant
30 feedback to the unisolated FP laser 2. Port 3 of the coupler was used to monitor the RB using power meter 8. Port 4 of the coupler was used to monitor the laser output using an isolator 9, a receiver 10 and spectrum analyzer 11

        Firstly, the effects of RB on the unisolated
35 laser were measured. The RF spectrum of the laser output is shown 15 in Fig. 2 and showed random frequency tones as high as 20 dB above the noise floor from dc to 500 MHz when

the laser was subject to RB. The "maxholding" function of
the spectrum analyzer was used for one minute. To show
that these random frequency tones were caused by RB, a 15-
dB bending loss was applied at the transmission end of the
5   10-km fibre and this removed these tones. These tones are
thought to be ascribed to mode hopping between laser modes
created by the laser cavity locking to the Rayleigh
backscatter external distributed cavity. This distributed
cavity is through to result from a superposition of the
10 reflections from the many scattering centres. The erratic
nature of the backscatter causes changes in this external
distributed cavity and causes a transition to occur within
the laser cavity as it follows these changes. During a
transition, the laser is thought to have two lasing
15 frequencies, and the RF tones are caused by the mixing of
these at the photodiode detector. The laser linewidth was
estimated to be around 1 kHz by measuring the width of RF
tones when the laser was subject to RB. Large linewidth
narrowing might be explained as the RB establishes a narrow
20 bandwidth reflection. The laser locks to this reflection
and then has a very narrow linewidth due to the long
effective cavity. The absolute power level of the RB
monitored from port 3 is shown 16 in Fig. 3 and fluctuated
on a time-scale comparable to 1 sec.
25   Secondly, a 0.25-W loudspeaker 17 seated on the
fibre spool 4 was driven by a 500-Hz 150-mA electrical
signal. The electrical input power was 180mW and the
generated audio output power was 58 dB. It is thought
that, when an acoustic wave is incident on the fibre, the
30 resulting changes in Fibre length, diameter and refractive
index cause a variation in optical phase due to the
photoelastic effect. Thus the laser output is optical-
phase modulated by the acoustic wave, as was the
backscattered light. Under the optical-phase modulation,
35 the RF spectrum of laser output showed no RF tones as shown
19 in Fig. 2 measured at port 4 of the coupler. The RF
spectrum of RB, as shown in Fig. 4, was measured at port 3

of the coupler. The first plot 20 shows the RF spectrum of
the RB without the presence of phase modulation. In this
case the laser linewidth is too small to be directly
measured, but the RF tone bursts 21 caused by the

5   backscatter of two coexisting narrow linewidth laser
outputs beating at the receiver can be seen. The laser
goes to a free running laser 22 when the phase modulation
was present. The RF spectrum of RB (showing laser
linewidth because RB is interferometric multipath signal)

10   indicated that linewidth-narrowing was also suppressed; the
laser linewidth increased to 110 MHz. As shown 23 in Fig.
3, the RB power monitored from port 3 was reduced by 3 dB
to -41 dBm and the second time-scale power fluctuation
disappeared.

15   Finally, an optical isolator was inserted
immediately after the FP laser to prevent RB from entering
the laser. With the isolator in placed, it was observed
that the RF spectrum, linewidth and power level were
substantially the same as when the fibre was optical-phase

20   modulated by an acoustic wave. Thus the acoustic (optical-
phase) modulation mimics the optical isolator in
suppressing the unwanted interaction between the RB and the
laser, which causes the RF noise tones.

        In an alternative embodiment, a shorter length of

25   fibre was utilized and an attempt made to directly couple
the acoustic vibrations into the fibre. An example of this
embodiment is shown schematically in Fig. 5 wherein a
speaker 30 was directly coupled to a short length of fibre
31 which was fixed 32, 33 around the speaker 30. The fibre

30   31 was held very taught between the fixing points 32, 33
and a lip of the speaker 30. The fibre 31 included a
standard 900 micron coating for protection. The
arrangement of Fig. 5 was found to successfully suppress RF
tones utilizing acoustic frequencies from 300Hz to 2500Hz.

35   Further operation up to 17KHz was also found to suppress RF
tones.

        Often the optimum frequency to drive the acoustic

wave at will be the resonant frequency of the total arrangement of Fig. 5. If a particular acoustic frequency is required than the fibre/speaker assembly can be appropriately designed.

5   It will therefore be evident that the foregoing embodiments include an external bending or stretching of the fibre to modulate the refractive index at a lower frequency. The stretching arrangement of Fig. 5 often requires considerable attention to achieve and the set up

10   can be unduly complicated in trying to ensure that the fibre does not slip. In practice, the easiest approach is to vibrate the fibre by bending it around the speaker. However the phase changes can still be very small although the mechanical energy required to bend a fibre is also very

15   small.

One way to substantially enhance the response to bending is to utilize an offset core fibre.

In bending a standard fibre with a concentric core, the first order response is zero because compression

20   on one side of the core is balanced by expansion on the other. If the core is displaced away from the centre by at least one core diameter (ca 10 microns), then a first order response is obtained since all the core is in compression or expansion at the same time. The index change is

25   substantially polarisation independent as the stress is axial.

Turning to Fig. 6, there is illustrated a single mode optical fibre 40 having an offset core 41 offset a length D from a central axis, with the fibre being bent

30   with a radius R. The index change increases with the offset D and with the inverse of the bend radius R. Through the utilization of a offset core fibre in the arrangement of Fig. 5, substantial enhancements can be achieved. Of course other forms of mechanical oscillator

35   could be used. For example, piezoelectric oscillators or other forms of micro mechanical oscillators could be utilized.

The foregoing embodiments can be implemented in a optical fibre communications network as part of a new network deployment or as a refitting of an old network to improve an existing network that is operating in an unisolated manner. In an old network, it may be part of the constraints that no breaking or resplicing of the current fibre can be undertaken. In this example, the arrangement of Fig. 5 can be utilized with an axial core fibre.

Where a stand alone device is to be provided then a device having an offset core fibre can be provided for splicing into the relevant portions of a communication network as a "retro-fitted' device otherwise an acoustic modulation of the inplace fiber may be provided without the need for a splicing of the network and without the necessity for shutting down the network for the period of instalment.

It would be appreciated by a person skilled in the art that numerous variations and/or modifications may be made to the present invention as shown in the specific embodiments without departing from the spirit or scope of the invention as broadly described. The present embodiments are, therefore, to be considered in all respects to be illustrative and not restrictive.

We Claim:

1. In an optical fibre lasing system including a laser system interconnected with an optical waveguide, a method of reducing the feedback effects from Rayleigh
5 backscattering comprising the step of:

subjecting portions of said optical waveguide to low frequency mechanical vibration so as to reduce feedback from Rayleigh backscattering of said optical waveguide.

10 2. A method as claimed in claim 1 wherein said low frequency mechanical vibration comprises a continuous oscillation.

3. A method as claimed in claim 2 wherein said low frequency is in the range of 300Hz to 1200Hz.

15 4. A method as claimed in claim 2 wherein said low frequency is in the range of 300Hz to 40KHz.

5. A method as claimed in claim 1 wherein said optical waveguide comprises an optical fibre.

6. A method as claimed in claim 1 wherein said
20 mechanical vibration of said optical waveguide occurs substantially adjacent is interconnection with said laser system.

7. An optical communications system comprising:
a laser source;
25 an optical waveguide interconnected to said laser source to carry an optical signal from said source to an optical receiver;

an optical receiver interconnected to said optical waveguide for decoding said signal;
30 a mechanical modulator adapted to substantially continuously mechanically perturb a portion of said optical waveguide so as to reduce Rayleigh backscattering from said optical waveguide.

8. An optical communications system as claimed
35 in claim 7 wherein said mechanical modulator comprises a mechanical oscillator.

9. An optical communications system as claimed

in claim 8 wherein said mechanical oscillator oscillates at a frequency in the range of 300Hz to 40Khz.

    10. An optical communications system as claimed in claim 8 wherein said mechanical oscillator oscillates at
5 a frequency in the range of 300Hz to 2500Hz.

    11. An optical communications system as claimed in any of claim 7 to claim 10 wherein said mechanical modulator is in contact with said optical waveguide.

    12. An optical communications system as claimed
10 in any of claim 7 to claim 10 herein said mechanical modulator emits an audio signal in the presence of said optical waveguide.

    13. An optical communications system as claimed in claim 7 herein said mechanical modulator interacts with
15 an initial portion of said optical waveguide substantially adjacent said interconnection with said laser.

    14. An optical communications system as claimed in claim 7 wherein said optical waveguide comprises an optical fibre and further includes a portion of an optical
20 fibre having an offset core and said mechanical modulator perturbs said portion.

    15. An optical communications system as claimed in claim 14 wherein said portion is bent into a coil.

    16. An optical fibre communications system
25 substantially as hereinbefore describe with reference to the accompanying drawings.
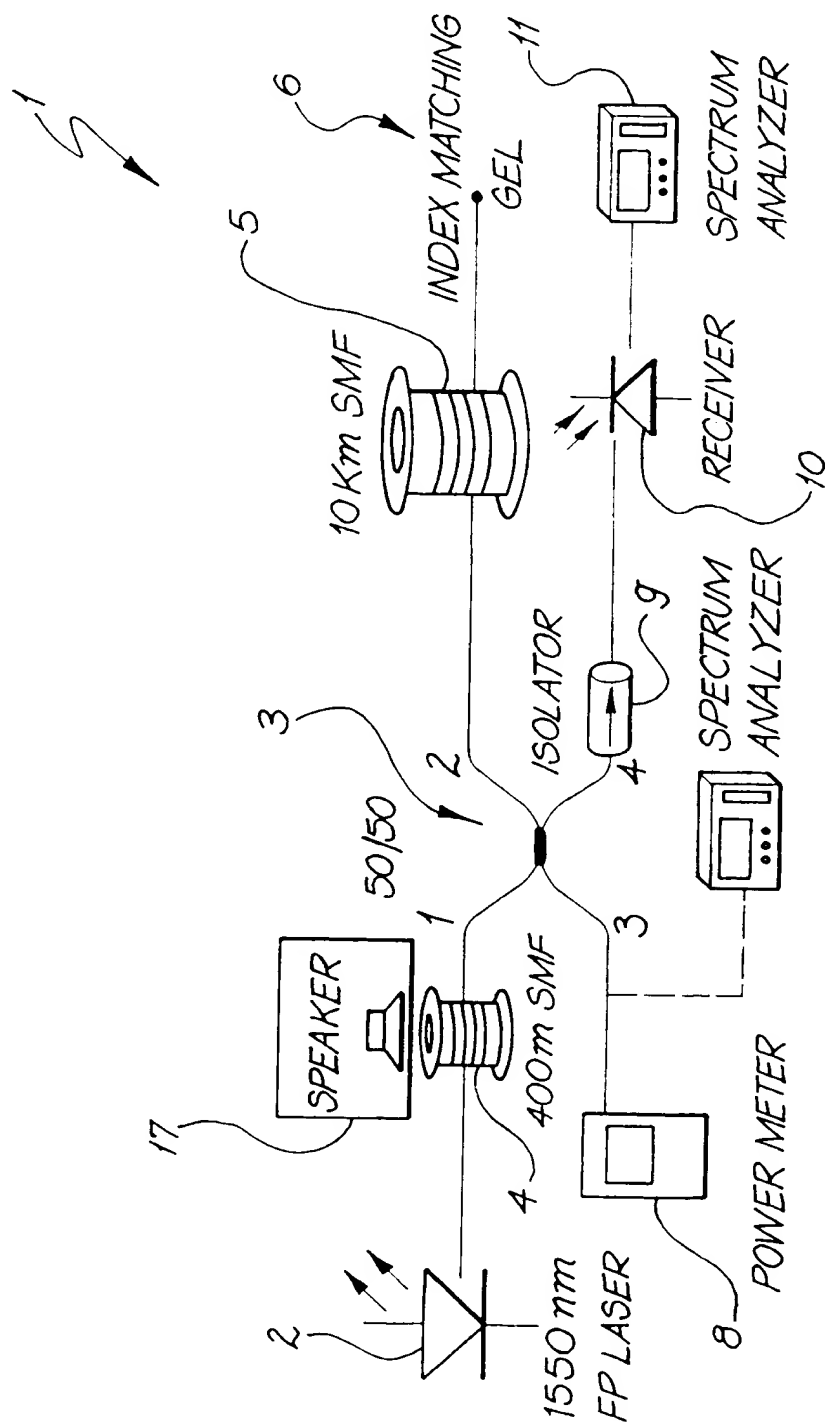
FIG. 1
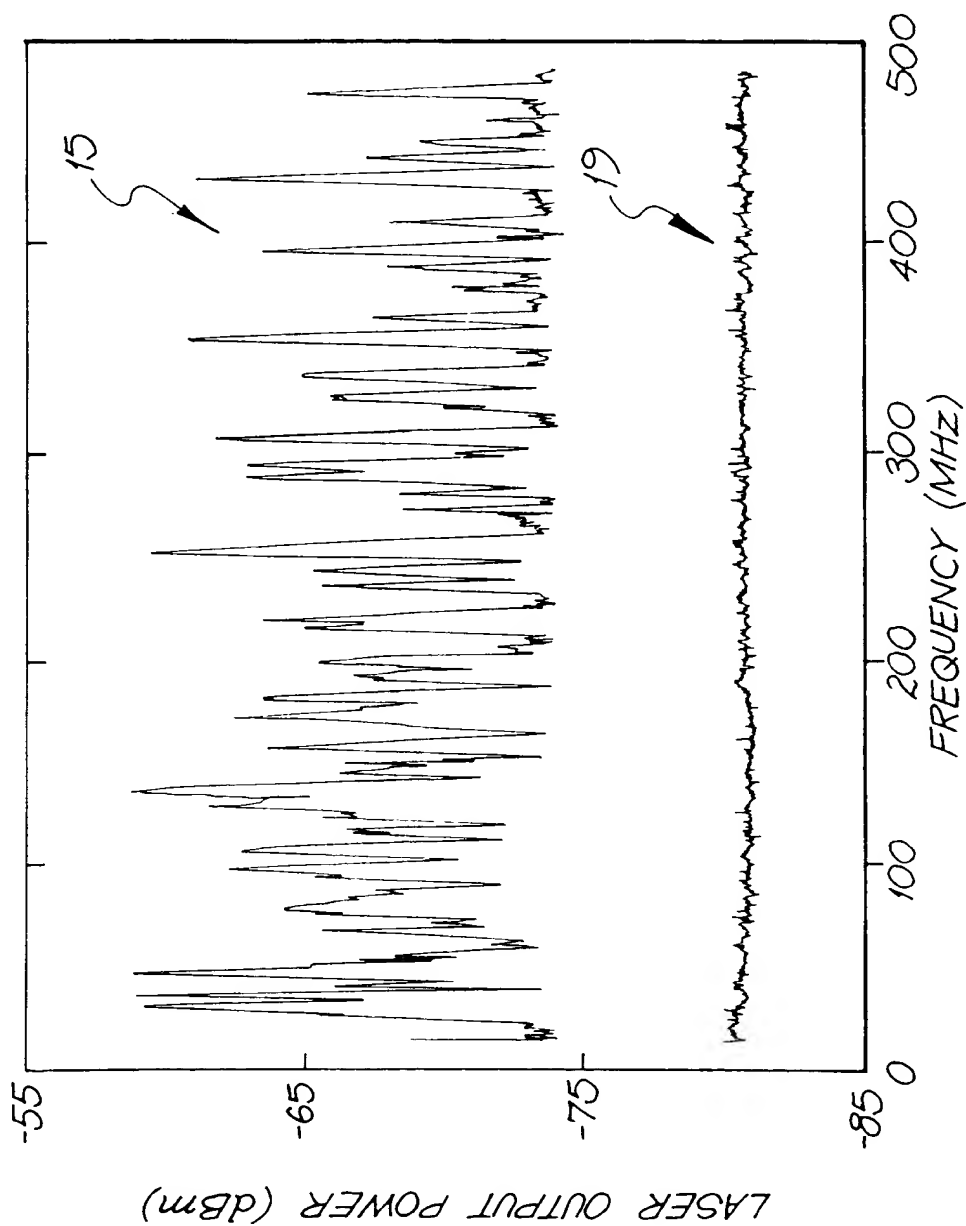
FIG. 2
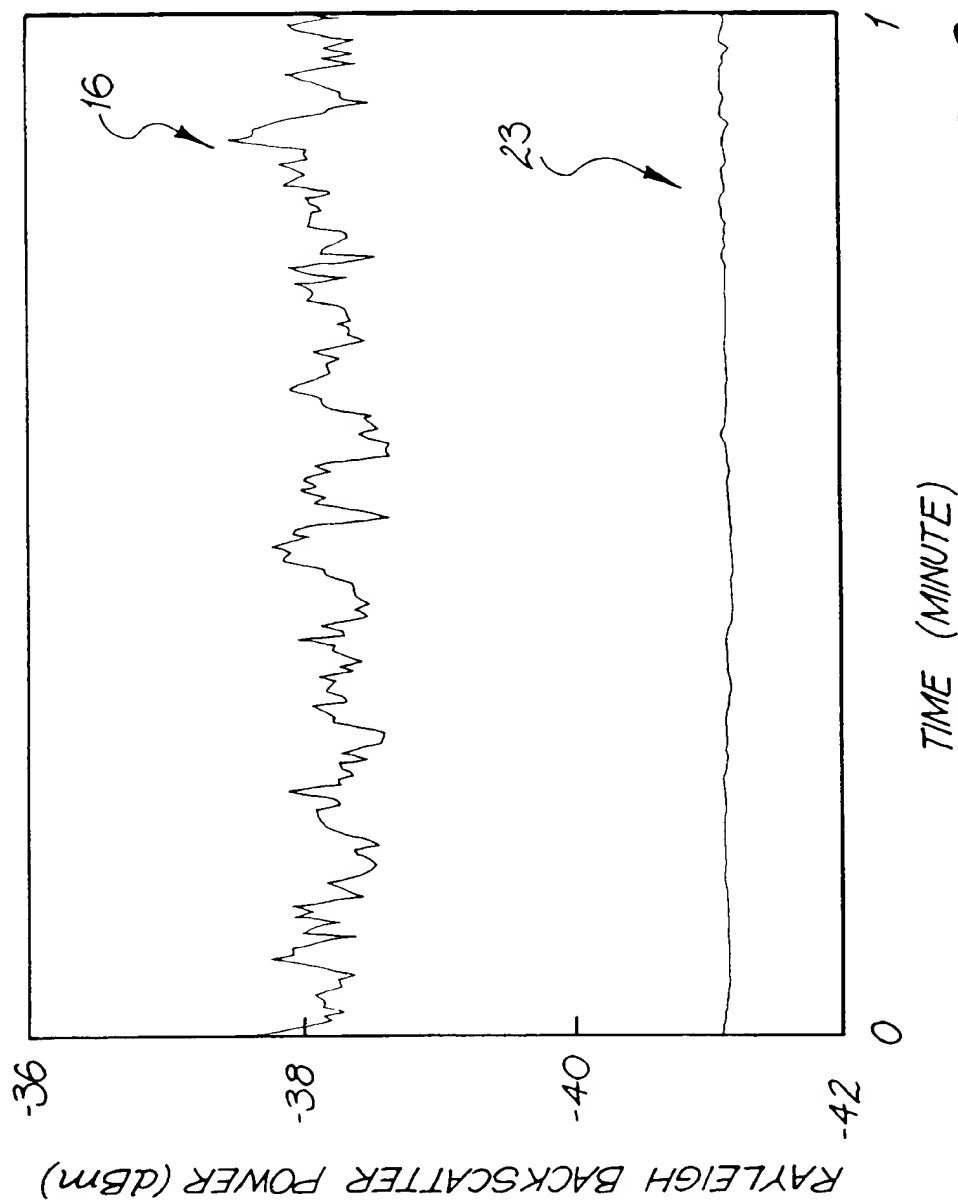
FIG. 3
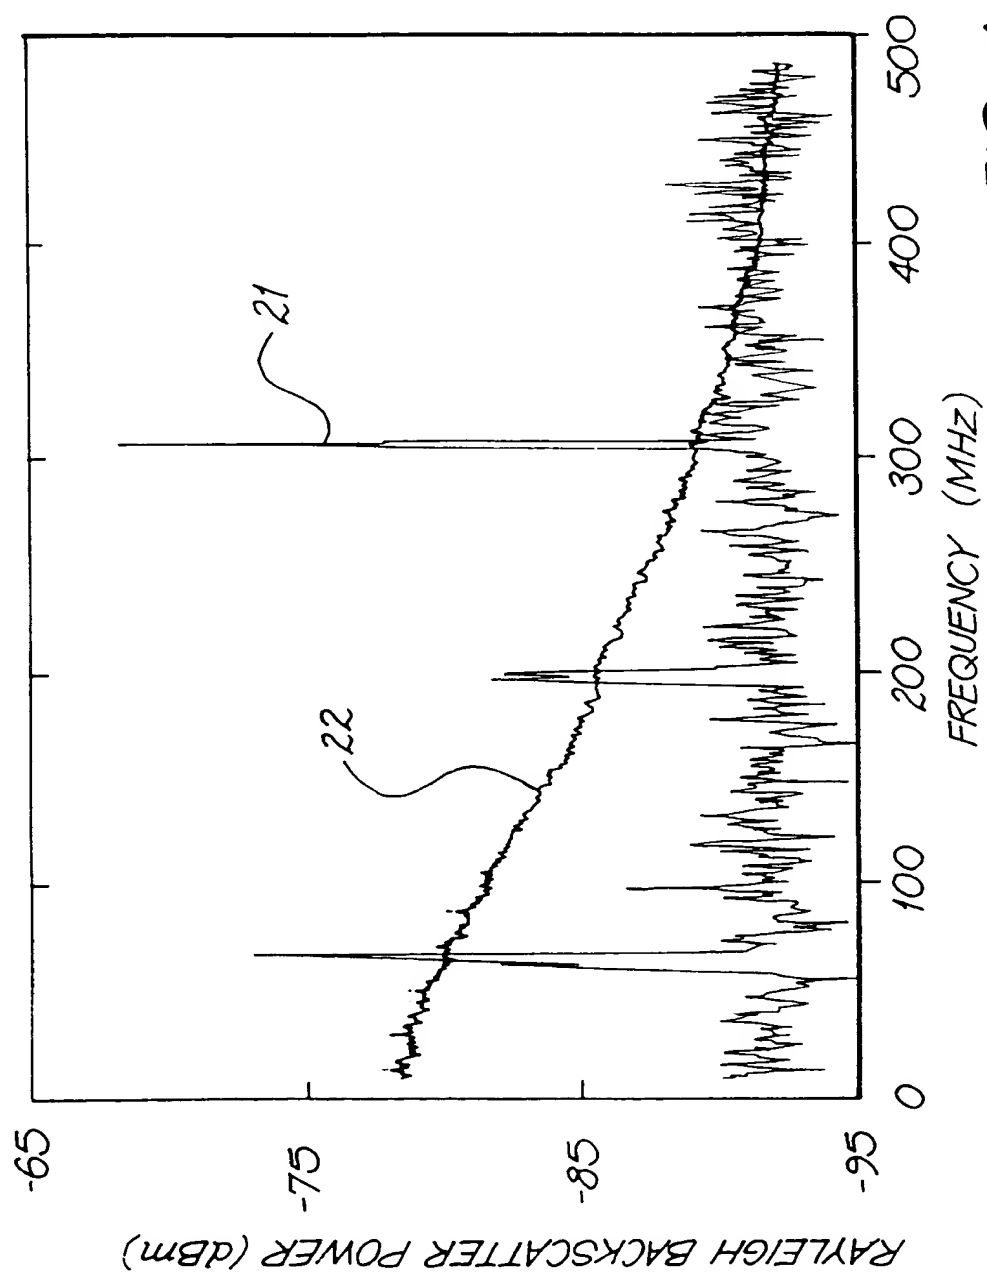
FIG. 4
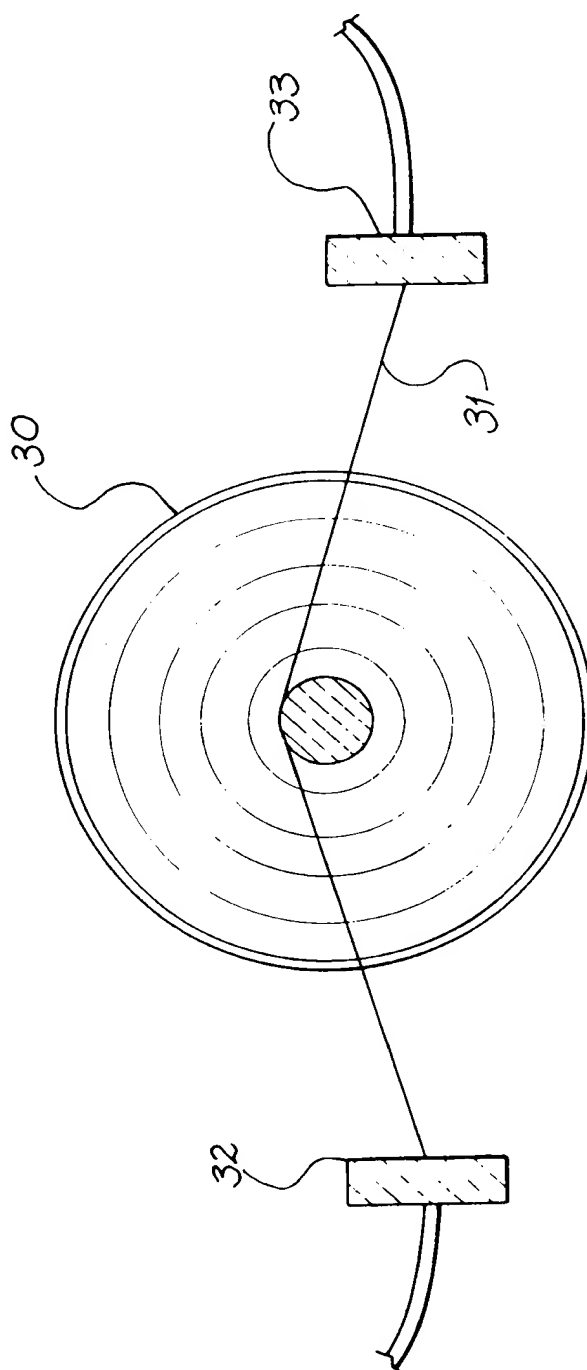
FIG. 5
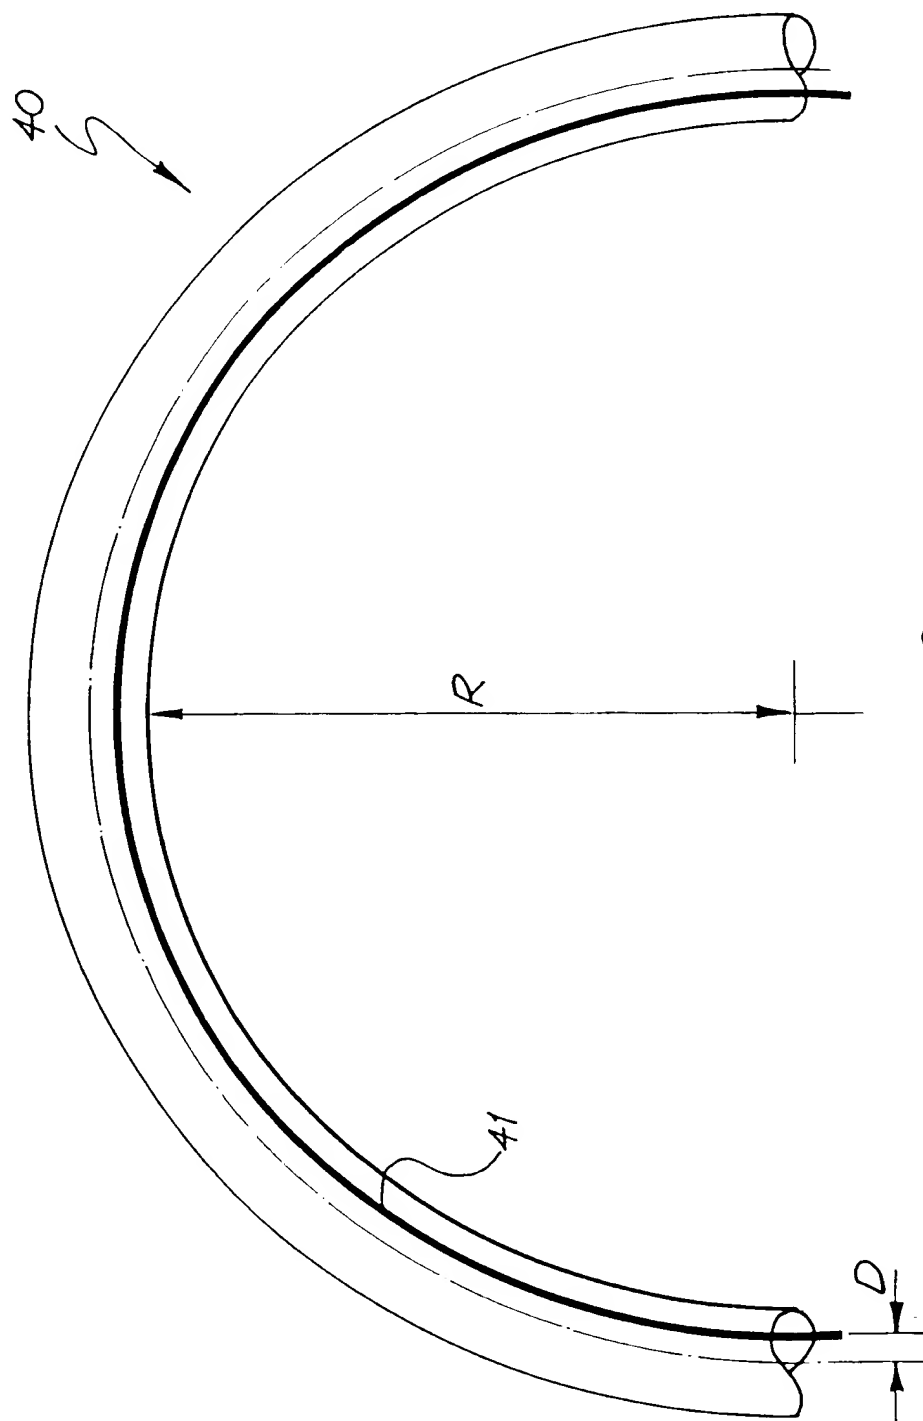
FIG. 6

INTERNATIONAL SEARCH REPORT

	international application No.
	PCT/AU 99/00056

A.	CLASSIFICATION OF SUBJECT MATTER

Int Cl^6:   H04B 10/12 G02B 6/10

According to International Patent Classification (IPC) or to both national classification and IPC

B.	FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC: H04B G02F, G02B, H01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
WPAT

C.	DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98/27406 (KINGS COLLEGE LONDON) 25 June 1998 whole document	1-16
A	US 5457532 (AUGUST et al.) whole document	1-16

☐ Further documents are listed in the continuation of Box C   ☒ See patent family annex

*	Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be of particular relevance		
"E"	earlier application or patent but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed	"&"	document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
11 February 1999	**2 3 FEB 1999**

| Name and mailing address of the ISA/AU
AUSTRALIAN PATENT OFFICE
PO BOX 200
WODEN ACT 2606
AUSTRALIA
Facsimile No.: (02) 6285 3929 | Authorized officer

J. LAW

Telephone No.: (02) 6283 2179 |

Form PCT/ISA/210 (second sheet) (July 1998) copjhw

INTERNATIONAL SEARCH REPORT
Information on patent family members

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report							
WO	9827406	GB	9626099				
US	5457532	EP	763188	JP	10501338	WO	9533183
		US	5559908				

END OF ANNEX